

Caratteristiche - Specifications - Caractéristiques - Características

		WMC	WMC-F
IN	Ø	1/2 BSP	1/2 BSP
	Press. Min.	-0,1 bar (-1.5 PSI)	1 bar (15 PSI)
	Press. Max.	6 bar (87 PSI)	6 bar (87 PSI)
	Temp. Max.	60°C (140°F)	60°C (140°F)
OUT	Ø	3/8 BSP	3/8 BSP
SHAFT	Ø	Hollow 28 mm	Hollow 28 mm
OIL	SAE 75W 90	0,6l (0.16 U.S.gal.)	0,6l (0.16 U.S.gal.)
WEIGHT	kg (lbs)	7,6 kg (16,7 lbs)	7,6 kg (16,7 lbs)
MOTOR	Type	IEC 100-112 B14-28 mm	

WMC **DX** **T** **R** **B** **SX** **BZ**

WMC-F **DX** **BZ** **R** **B** **SX**



Guarnizioni - Seals
Joints - Juntas

Anteriori - Front

"V"

Posteriori - Rear

"U"




WML - 1450 RPM

Codice Code	Modello Model	Press. Max Max Pres.		Portata Flow		Potenza Power		Pistone Plunger Ø mm	Corsa Stroke mm
		bar	PSI	l/min	GPM	kW	hp		
04.8050.97.3	WMC1117	170	2500	11	2,9	3,3	4,5	18	9,8
04.8051.97.3	WMC 1217	170	2500	12	3,1	3,6	5	18	10,8
04.8052.97.3	WMC 1317	170	2500	13	3,4	4	5,5	18	12,4
04.8053.97.3	WMC 1515	150	2200	15	3,9	4	5,5	18	13,6

WML-F - 2800 RPM

Codice Code	Modello Model	Press. Max Max Pres.		Portata Flow		Potenza Power		Pistone Plunger Ø mm	Corsa Stroke mm
		bar	PSI	l/min	GPM	kW	hp		
04.8060.97.3	WMC 1114-F	140	2000	11	2,9	2,9	4	15	8
04.8061.97.3	WMC 1120-F	200	2900	11	2,9	4	5,5	15	8
04.8062.97.3	WMC 1316-F	160	2350	13	3,43	4	5,5	15	9,8
04.8063.97.3	WMC 1320-F	200	2900	13	3,43	5,1	7	15	9,8
04.8064.97.3	WMC 1515-F	150	2200	15	3,96	4	5,5	15	10,8
04.8065.97.3	WMC 1520-F	200	2900	15	3,96	5,5	7,5	15	10,8

WMC / WMC-F

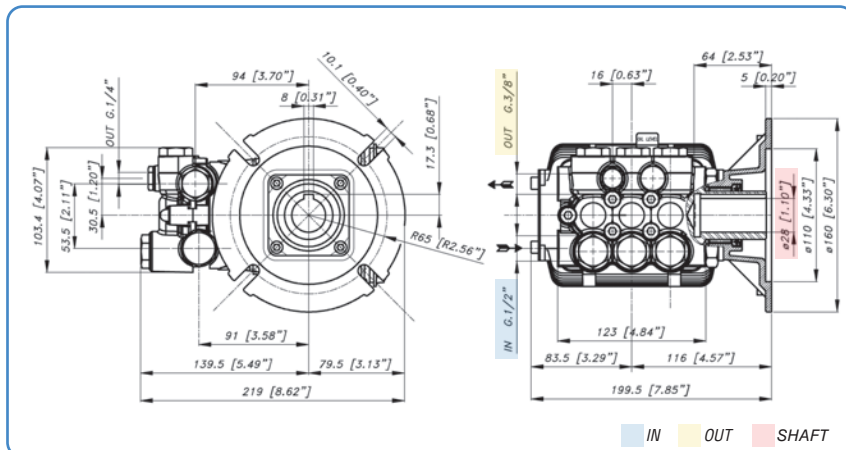

Accessori di completamento - Complementary accessories
Accessoires complémentaires - Accesorios complementarios



pag.125